

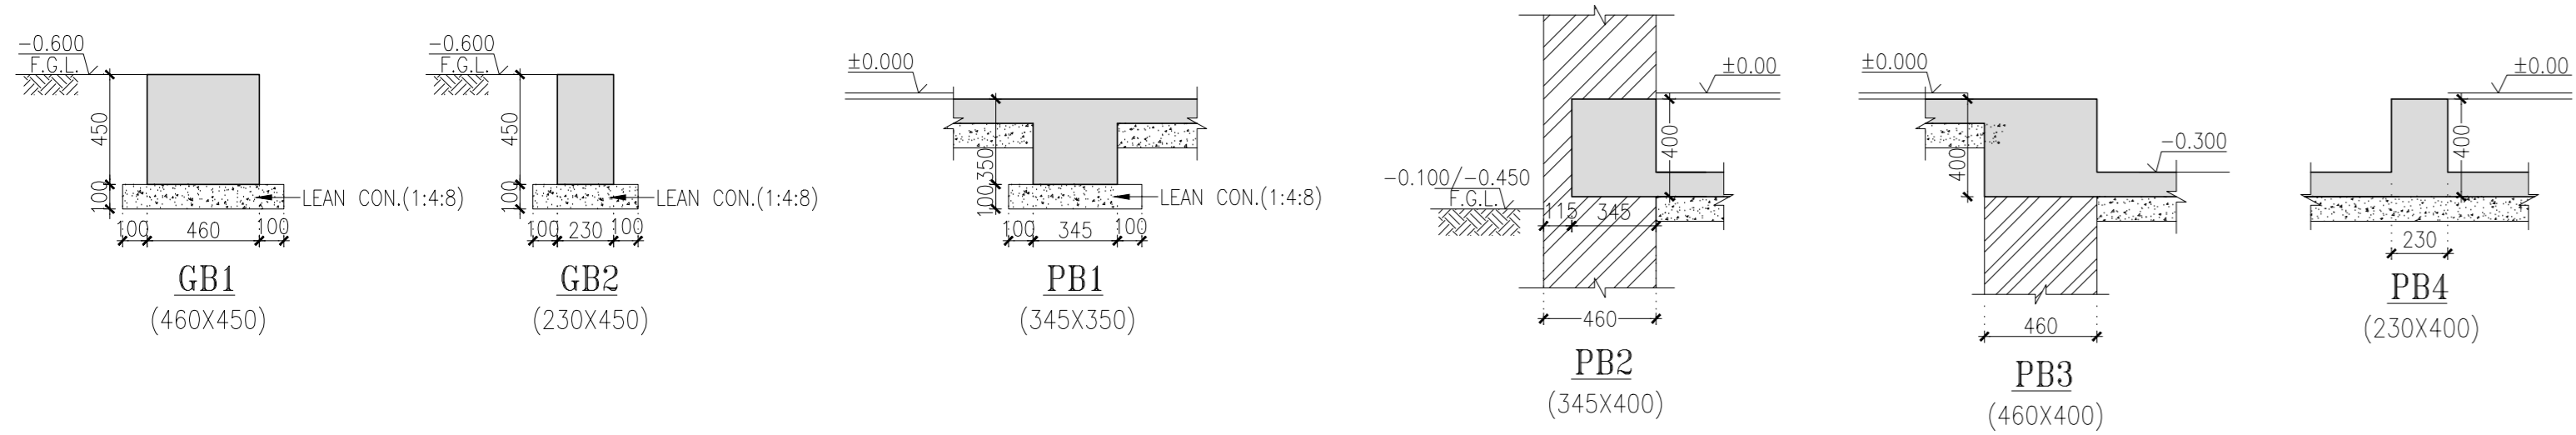


PLINTH PLAN AT ±0.00M LVL.

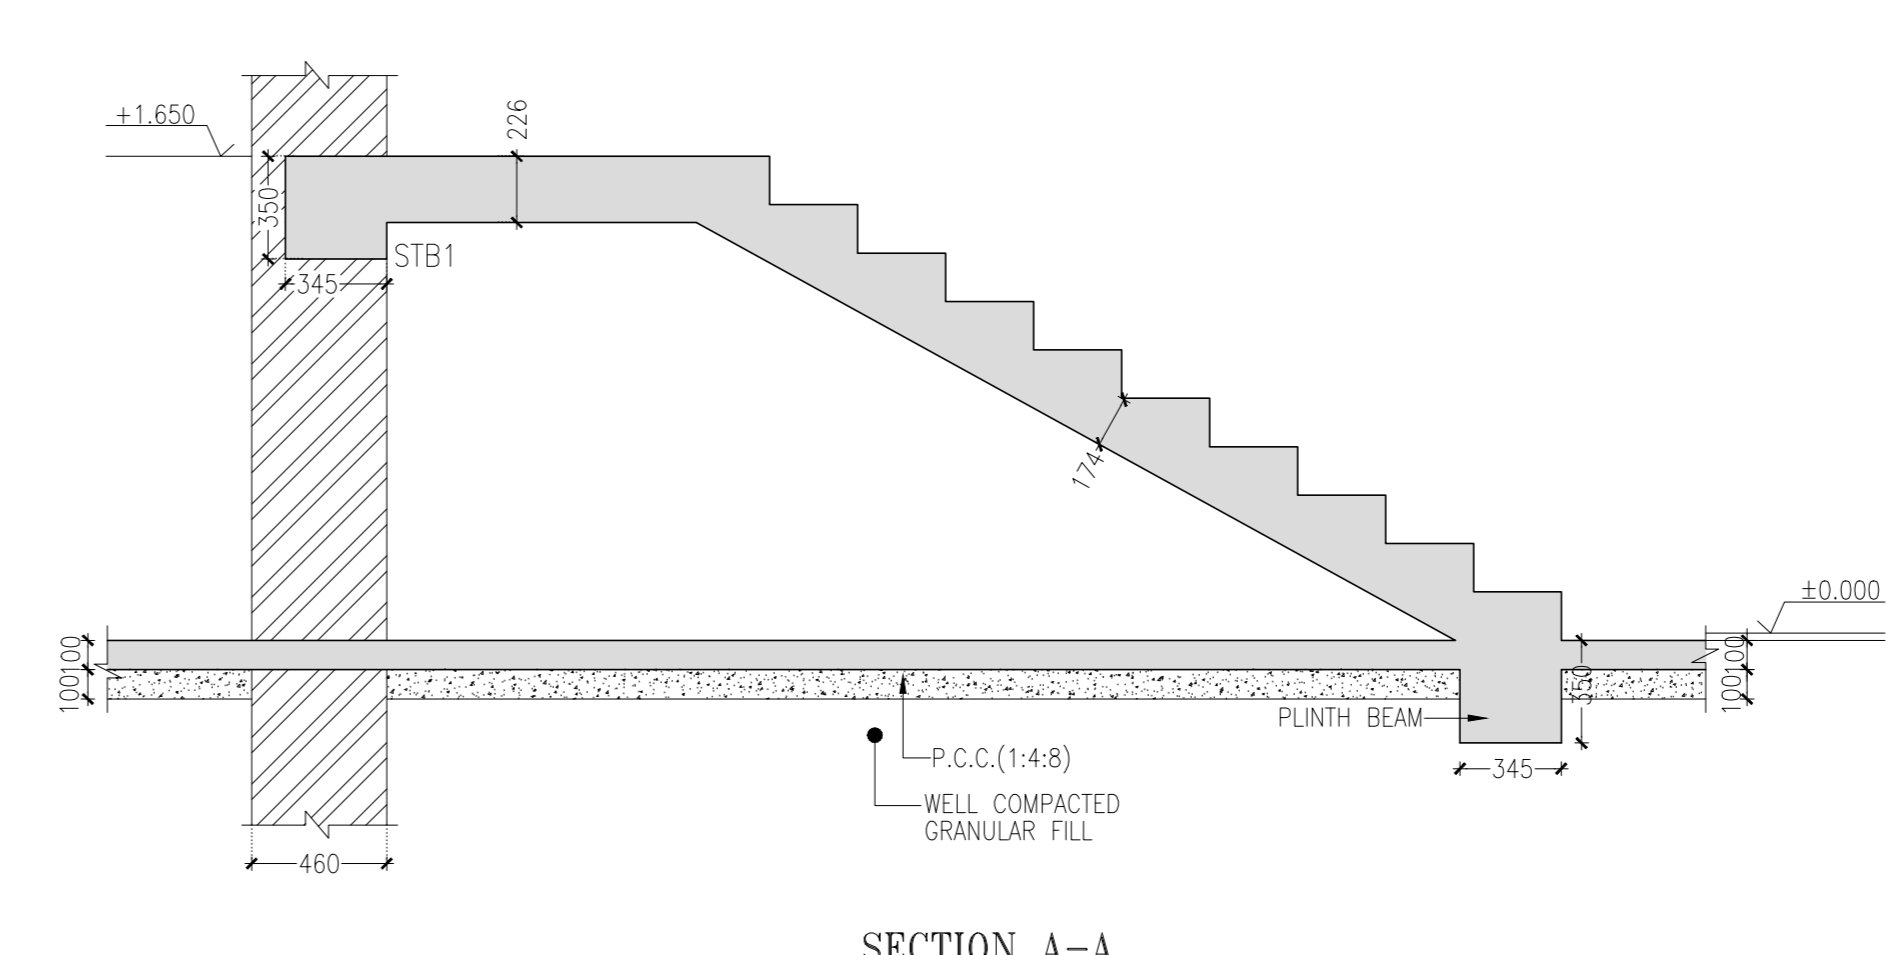

COLUMN SCHEDULE	
COLUMN	SIZE
C1	230X345
C2	230X230
C3	345X345

GROUND BEAM/PLINTH BEAM SCHEDULE	
BEAM	SIZE
GB1	460X450
GB2	230X450
PB1	345X350
PB2	345X400
PB3	460X400
PB4	230X450

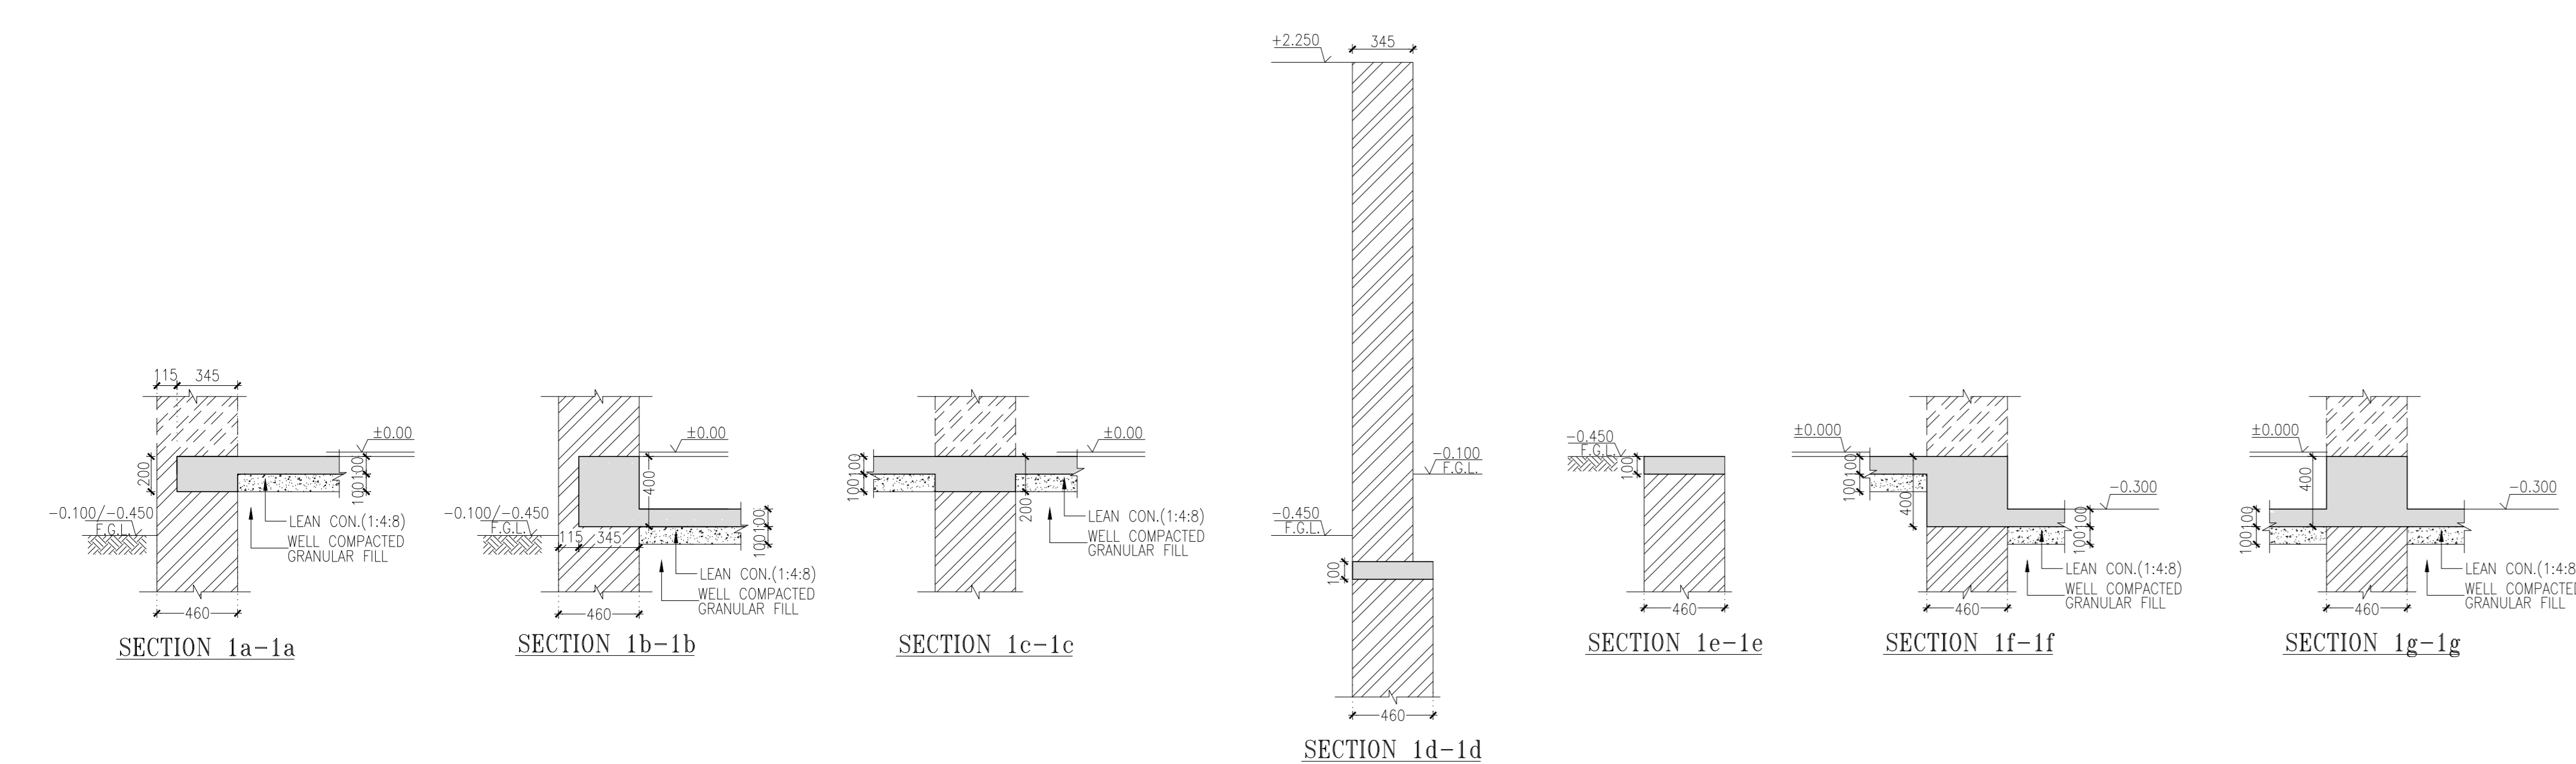

THIS DRAWING IS THE PROPERTY OF VINOD SHAH CONSULTING ENGINEERS PVT. LDM AND NOT TO BE COPIED OR USED WITHOUT THEIR PERMISSION.

NOTES:

DETAIL: REMARKS

REFERENCE: ALL DIMENSIONS TO BE CHECKED AND CORRELATED WITH ALL RELATED DRAWINGS AND ANY AMBIGUITY SHALL BE IMMEDIATELY BROUGHT TO THE NOTICE OF THE ENGINEERS BEFORE COMMENCEMENT OF THE WORK.

DIMENSION: ALL DIMENSIONS ARE MM AND LEVELS ARE IN METERS. ALL DIMENSIONS ARE TO BE READ AND NOT TO BE MEASURED.

MASONRY SPEC: ALL MASONRY WALLS SHALL BE CONSTRUCTED FROM BURNT CLAY BRICKS UP TO ±0.00 LEVEL WITH MIN. COMPRESSIVE STRENGTH OF 7.5 N/mm² ON GROSS AREA UNLESS OTHERWISE SPECIFIED. BRICK MASONRY SHALL BE BEDDED WITH CEMENT - SAND MORTAR IN PROPORTION OF 1:4 UNLESS OTHERWISE SPECIFIED.

CEILING FLOOR: ALL CEILING MASONRY WALLS SHALL BE CONSTRUCTED FROM COMPRESSED STABILIZED EARTH BLOCK WITH MIN. COMPRESSIVE STRENGTH OF 7.5 N/mm² ON GROSS AREA UNLESS OTHERWISE SPECIFIED.

CEILING MASONRY: CEILING MASONRY SHALL BE BEDDED WITH CEMENT - SAND MORTAR IN PROPORTION OF 1:4 UNLESS OTHERWISE SPECIFIED. PROM TEST IS RECOMMENDED TO ENSURE THE EFFICIENCY OF MASONRY WALL AGAINST COMPRESSED STABILIZED EARTH BLOCK.

CONC. SPEC: ALL CONCRETE MIX USES UNLESS OTHERWISE SPECIFIED.

REINFORCEMENT: R INDICATES TMT STEEL (Fe 500) OF YIELD STRENGTH 500 N/mm².

COVER: CLEAR COVER TO MAIN STEEL IS AS FOLLOWS:
 PILES : 50 mm
 PILE CAP : 40 mm
 GRADE BEAM : 30 mm
 FOOTINGS : 50 mm
 DECK & TOP BOTTOM : 50 mm
 COLUMNS & PEDESTALS : 40 mm
 BEAMS & LINTELS : 30 mm
 SLABS : 25 mm

LAP/ SPLICES: LAP LENGTH IS FIFTY TIMES BAR DIAMETER.

LEGENDS:
 [Pattern] COLUMN/WALL STARTS FROM THIS LEVEL.
 [Pattern] COLUMN/WALL STOPS AT THIS LEVEL.

FOR TENDER PURPOSE ONLY

No.	Date	Remarks

Revisions

Date	Prints Issued to	Date	Prints Issued to

Distribution of Prints

Consultants

- Structural Consultants: VINOD SHAH CONSULTING ENGINEERS PVT. LTD.
- Services Consultants: DBHMS
- Landscape Consultants: Earthscapes Consultancy Pvt Ltd
- Road and Pathways Consultants: Arhmm Infra Consultants LLP

Project: Nalanda University, Rajgir, Bihar

Title: STRUCTURAL G.A. DRAWINGS OF PLINTH PLAN & DETAILS FOR STUDENT HOUSING (TYPE-05)

Drawn: HS
 Checked: AJ
 Date: 09/06/2016

Drawing No.: NUC-RSH-S-A-5.3

VASTU SHILPA CONSULTANTS
 Architects | Planners | Urban Designers

Sangam, Thaha Road, Arrah, Bihar - 800504
 Phone: 079-27454537 Fax: 079-27452006
 www.sangam.org e-mail: vsc@sangam.org