




SECTION a3-a3

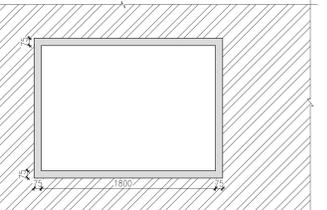


SECTION a2-a2




SECTION a5-a5




SECTION b2-b2




SECTION b4-b4

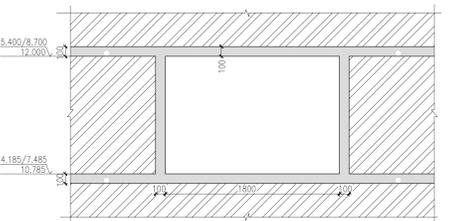


SECTION a1-a1




SECTION a4-a4

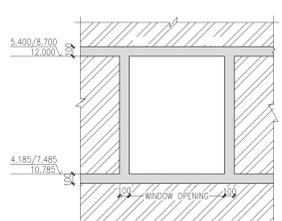


SECTION b1-b1




SECTION b3-b3

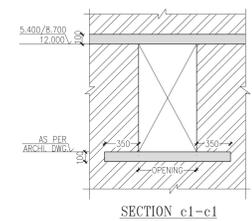


SECTION c1-c1




SECTION c2-c2



SECTION c3-c3

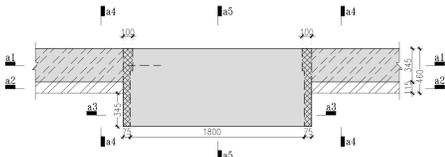


LINTEL LEVEL PLAN

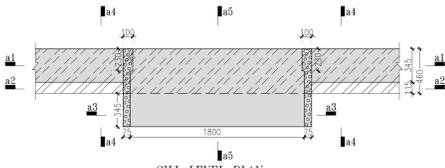


SILL LEVEL PLAN

DETAIL-A  
(TYP. DETAIL OF JAMB, SILL BAND (S4C) & LINTEL BAND (L4C)  
FOR WINDOW OPENING)

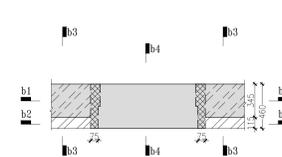


LINTEL LEVEL PLAN

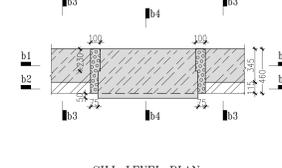


SILL LEVEL PLAN

DETAIL-B  
(TYP. DETAIL OF JAMBS (J4), SILL BAND (S4b), LINTEL BAND (L4b)  
FOR WINDOW OPENING  
(FOR LOCATION OF JAMBS (J4) REFER SILL LEVEL PLAN)




LINTEL LEVEL PLAN




SILL LEVEL PLAN


TYP. DETAIL OF SILL FOR SMALL  
OPENINGS WITHOUT JAMBS  
(FOR LOCATION OF REFER ARCH. DRAWINGS)

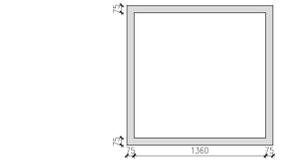


SECTION d3-d3

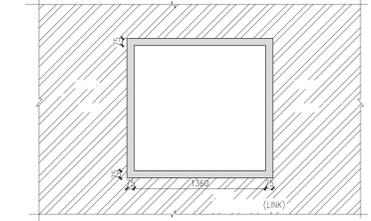


SECTION d2-d2




SECTION d5-d5

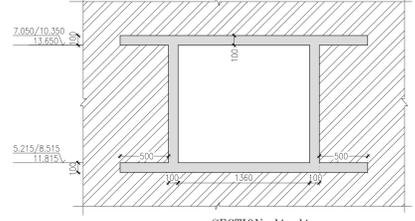


SECTION d1-d1



SECTION d4-d4

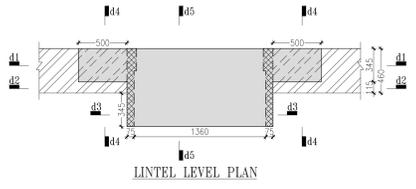

LINTEL LEVEL PLAN

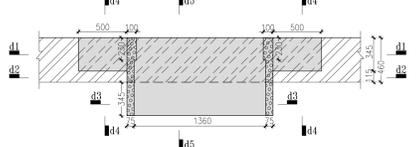

SILL LEVEL PLAN

DETAIL-D FOR STAIRCASE PORTION  
(TYP. DETAIL OF JAMB, SILL BAND (S4C) &  
LINTEL BAND (L4C) FOR WINDOW)

NOTES:

DETAIL	REMARKS
REFERENCE	ALL DIMENSIONS TO BE CHECKED AND CORRELATED WITH ALL RELATED DRAWINGS AND ANY AMBIGUITY SHALL BE IMMEDIATELY BROUGHT TO THE NOTICE OF THE ENGINEERS BEFORE COMMENCEMENT OF THE WORK.
DIMENSION	ALL DIMENSIONS ARE MM AND LEVELS ARE IN METER.
FOUNDATION	ALL DIMENSIONS ARE TO BE READ AND NOT TO BE MEASURED.
FINISH	FINISH WORK TO BE DONE AS PER IS: 2911-2010.
MASONRY	ALL MASONRY WALLS SHALL BE CONSTRUCTED FROM MASONRY CLAY BRICKS UP TO SLAB LEVEL WITH MIN. COMPRESSIVE STRENGTH OF 7.5 N/mm <sup>2</sup> ON GROSS AREA UNLESS OTHERWISE SPECIFIED.
CONC. SPEC.	ALL CONCRETE MIX W/CS UNLESS OTHERWISE SPECIFIED.
REINFORCEMENT	INDICATES TMT STEEL (Fe 500) OF YIELD STRENGTH 500 N/mm <sup>2</sup> .
COVER	CLEAR COVER TO MAIN STEEL IS AS FOLLOWS: PILES : 50 mm PILE CAP : 40 mm GRADE BEAM : 50 mm FOOTINGS : 50 mm COLUMNS & PEDESTALS : 40 mm BEAMS & LINTELS : 30 mm SLABS : 25 mm
LAP/ SPLICES	LAP LENGTH IS FIFTY TIMES BAR DIAMETER.
SPECIAL NOTE	THE BUILDING IS DESIGNED FOR G+3 STOREYS ONLY AND NO FUTURE PROVISION IS CONSIDERED.
LEGENDS	<ul style="list-style-type: none"> <li>Column/Wall starts from this level</li> <li>Column/Wall stops at this level</li> </ul>

FOR TENDER PURPOSE ONLY

No.	Date	Remarks

Revisions

Date	Prints Issued to	Date	Prints Issued to

Distribution of Prints

No.	Date	Remarks

Consultants

- Structural Consultants: VINOD SHAH Consulting Engineers Pvt. Ltd.
- Services Consultants: DBHMS
- Landscape Consultants: Earthscapes Consultancy Pvt Ltd
- Road and Pathways Consultants: Arhmm Infra Consultants LLP

Project

Nalanda University, Rajgir, Bihar

Title

STRUCTURAL G.A. DRAWINGS OF TYPICAL FLOOR SILL & LINTEL LVL. DETAILS FOR FACULTY HOUSING (APPT. TYPE-1B)

Drawn by: KP  
Checked by: AJ  
Date: 07/09/2016

VASTU SHILPA CONSULTANTS  
Architects | Planners | Urban Designers  
Sangath, Thakri Road, Ahmedabad - 380054  
Phone: 079-27454537 Fax: 079-27452006  
www.sangath.org e-mail: vsc@sangath.org